

TrueConf H.323/SIP Gateway

About the Product

TrueConf Gateway H.323/SIP is our software-based system which allows you to utilize equipment that uses H.323/SIP protocols with video conferencing terminals in the network based on TrueConf Server system. The Gateway ensures implementation of personal and group video conferences between H.323/SIP users and TrueConf customers. This provides for visual communication within a local areanetwork, with the option of adding users who are outside it. In order to get best system performance, TrueConf Gateway must be placed in the segment of local network where H.323/SIP

terminal is located. If there is necessity to connect several H.323/SIP video conferencing terminals into the TrueConf network, each terminal must be connected to the separate TrueConf Gateway. TrueConf Gateway H.323/SIP coordinates the work of protocols, and, if it is necessary, performs transcoding of audio and video formats that correspond H.323 protocol to the formats that are used in TrueConf, and vice versa. Calls addressing in the mixed system is done by aliases that correspond to the users' e-mail addresses.


Features

- Use of H.323/SIP video conferencing server terminal as the client device.
- Participation in group video conferences in TrueConf Server.
- Provides connection between two H.323/SIP terminals through the Internet.
- Successful work on slow and unstable network channels.



Recommended Hardware (PC) Configurations

- Operating system Microsoft Windows XP/7, Server 2003/2008.
- CPU Intel Core 2 Duo E6700, Intel Core 2 Quad, Intel Core i3, i5, i7.
- 1 GB RAM.
- Network 512 kbps in both directions or faster.

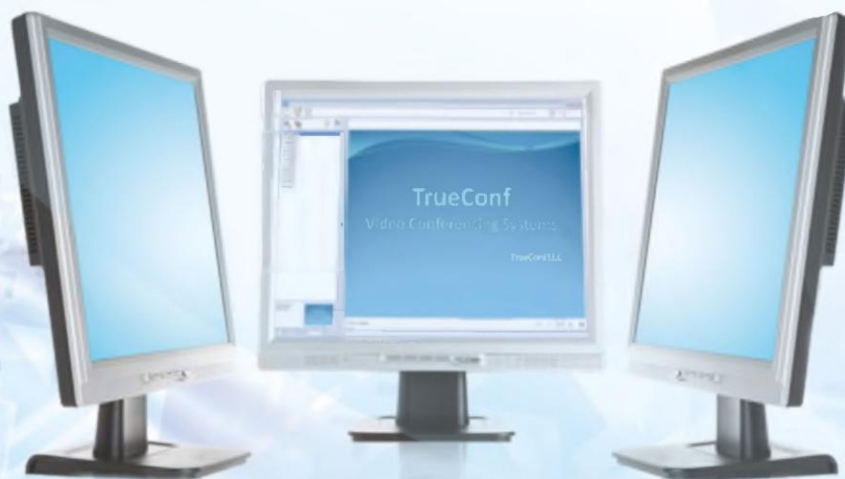

+1 347 TRUECNF (878 3263)

www.trueconf.com